



# OLOFSTRÖM

**UNIFEEDER**



## **PRESS AUTOMATION**

### **VACUUM BELT CONVEYOR**

- **Simple and solid construction.**
- **Both Steel and Aluminium can be transported.**
- **Many year's experience from industrial controllers and press automation contributes to user friendliness and high productivity.**


***PDS***

## Functional Principle

The Vacuum Belt Conveyor is a device for transportation of blanks.

### Handling Capability:

Feed direction	min 100 mm max 2500 mm.
Width	min 100 mm. max 4500 mm
Weight. (panel). Speed	max 60 kg. ca 17 stroke/min.
Weight:	800 kg

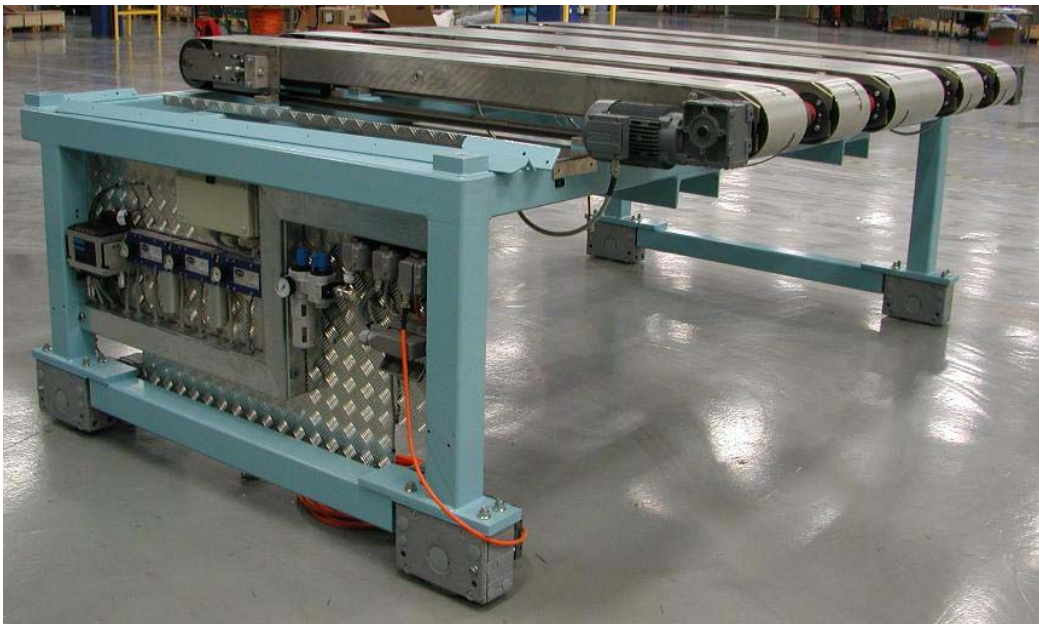

Data for speed is stored in the control system.

Edition 1.30 eng

**PDS**

e-mail: [info@pdsautomation.se](mailto:info@pdsautomation.se)  
Website: [www.pdsgroup.se](http://www.pdsgroup.se)

PDS Automation AB  
Komponentvägen 2  
SE-293 37 OLOFSTRÖM  
Sweden

Tel: +46 (0)454 480 80